



HAMM

PRODUCT RANGE



A FACTORY FULL OF INNOVATIONS

Where the heart of compaction beats

In the heart of Europe, surrounded by a wonderful region full of ponds in the north of Bavaria, lies Tirschenreuth. In 1878, Franz and Anton HAMM founded Maschinenfabrik Gebr. HAMM there. Since the beginning of the 20th century, our company has focused on the manufacture of rollers for road construction. From that time on, HAMM has been the driving force and trendsetter in the industry. Many technologies and solutions that have become the standard in the compaction sector were developed by HAMM. Today, HAMM is the world market leader in the road roller segment.

At the parent plant in Tirschenreuth, a team of highly motivated engineers and technicians work to develop the rollers for global markets. The extensive range of machines encompasses various tandem rollers, a wide choice of compactors as well as pneumatic-tyre rollers. Modern solutions with which to optimise the compaction process round off the product portfolio. These allow HAMM to offer practical, tailor-made solutions for every compaction task in road building and earthworks.

In addition to the rollers, HAMM also manufactures the drums in Tirschenreuth. State-of-the-art production processes allow every machine to be finished individually to customer specification. HAMM AG's main plant is also certified in accordance with ISO 14001, meaning that HAMM is constantly striving to reduce emissions and the use of resources in the production of rollers.

AWARD-WINNING AND FUTURE-ORIENTED

Shaping the future



HAMM rollers are easy to operate and ergonomically optimised, because HAMM has considered design to be a crucial element in product development since the 1980s. As a result, HAMM has, to date, won close to 40 international design and innovation awards, making it the front runner in the construction industry.

HAMM also takes sustainability very seriously. On the construction site, the rollers are impressive thanks to their low fuel consumption. What's more, most models can not only be operated with diesel, but also with non-fossil fuels, such as HVO. In addition, HAMM constantly strives to reduce emissions and the use of resources during production of rollers in the factories.

HAMM PRODUCT RANGE

TANDEM ROLLERS, ARTICULATED

- > Drum width: 800 - 2,140 mm
- > Working weight: 1.5 - 14 t

TANDEM ROLLERS, PIVOT-STEERED

- > Drum width: 1,500 - 1,680 mm
- > Working weight: 7 - 9 t

SOIL COMPACTORS

- > Drum width: 1,370 - 2,140 mm
- > Working weight: 5 - 26 t

PNEUMATIC-TYRE ROLLERS

- > Width over tyres: 1,127 - 1,830 mm
- > Working weight: 4 - 27 t

PRODUCT OVERVIEW



Tandem rollers

37 models
1.5 - 4.5 t
HD 8 - HD 14(i)
LRC / HRC
Page 08/09



HD COMPACTLINE SERIES

8 models 
2.5 t
HD 10e - HD 12e



HD COMPACTLINE SERIES

Page 10/11

10 models
7 - 11 t
HD 70 - HD 110
LRC
Page 12/13




HD SERIES

46 models
7 - 14 t
HD+ 70i - HD+ 140(i)
HRC
Page 14/15



HD+ SERIES

6 models 
9 t
HD+ 90i PH
HRC
Page 14/15



HD+ SERIES

9 models
7 - 9 t
HX 70i - HX 90i
HRC
Page 16/17



HX SERIES

Soil Compactors

5 models
5 - 7 t
HC 50i - HC 70i
LRC / HRC
Page 18/19



HC COMPACTLINE SERIES

44 models
11 - 26 t
HC 110(i) - HC 250(i)
LRC / HRC
Page 20/21



HC SERIES

Pneumatic-tyre rollers

2 models
11 - 12 t
HC 119 - HC 129
LRC
Page 22/23



HC SERIES

34 models
10 - 28 t
HP 180(i) - HP 280(i)
LRC / HRC
Page 24/25



HP SERIES

THE AGILE ALL-ROUNDERS

The wasp-waist rollers



Easy transport

central suspension point, many tie-down points

Water system

3x filtering, simple complete emptying

Large drums

counteract crack and bulge formation

The articulated compact rollers in the HD CompactLine series are all-rounders for asphalt construction, earthworks and landscape gardening. Their operation is extremely easy and calls for no special language skills. The wasp-waist design provides optimal visibility, and the 3-point articulation ensures outstanding driving and handling characteristics.

With a total of 37 vibration, oscillation and combination rollers, and drum widths from 0.80 to 1.38 m, the HD CompactLine covers the entire spectrum of compact rollers. There are also countless options, such as chip spreader, a cabin and different lighting versions. The rollers can also be operated with HVO fuels.

HD COMPACTLINE SERIES TANDEM AND COMBINATION ROLLERS

Basic data					Drums / variants		
Machine model	Weight class (t)	Drum width (mm)	Engine power (kW)	Max. working width (mm)	VV	VO	VT
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard							
HD 8	1.5	800	16.1	856	•		
HD 9	1.5	900	16.1	1000	•		•
HD 10C	1.5	1000	16.1	1064	•		•
Machines in accordance with the EPA Tier 3 exhaust emission standard							
HD 10	2.5	1000	22.9	1050	•	•	•
HD 12	2.5	1200	22.9	1250	•	•	•
HD 13	4.0	1300	34.6	1350	•	•	•
HD 14	4.5	1380	34.6	1430	•	•	•
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard							
HD 10	2.5	1000	18.5	1050	•	•	•
HD 10i	2.5	1000	24	1050	•	•	•
HD 12	2.5	1200	18.5	1250	•	•	•
HD 12i	2.5	1200	24	1250	•	•	•
HD 13i	4.0	1300	37.4	1350	•	•	•
HD 14i	4.5	1380	37.4	1430	•	•	•

HD COMPACTLINE SERIES PNEUMATIC-TYRE ROLLERS

Basic data				
Machine model	Weight class (t)	Width over tyres (mm)	Engine power (kW)	Wheel load (t)
Machines in accordance with the EPA Tier 3 exhaust emission standard				
HD 14 TT	4	1127 / 1276	34.6	0.5
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard				
HD 14i TT	4	1127 / 1276	37.4	0.5

VV Vibration at front - vibration at rear

VT Vibration at front - set of wheels at rear

VO Vibration at front - oscillation at rear

TT Set of tyres at front - set of wheels at rear

BATTERY-POWERED ELECTRIC TANDEM ROLLERS

Quiet and zero-emissions compacting



In terms of operation and compaction power, the eight fully electrically driven tandem rollers from HAMM are identical to their sister models with combustion engines. Thanks to the electric drive, they work on construction sites with zero local emissions and with significantly reduced noise.

A 48 V system supplies the travel, steering and vibration or oscillation drives with energy. The steering and travel drive use hydraulic systems, while the vibration or oscillation units

are fully electric. This results in long operating times. All electric components also require no maintenance and offer impressively high drive torque.

A Li-Ion battery provides sufficient energy for a typical working day. The majority of the braking energy is also recovered through recuperation. Using the CEE fast charging plugs, the batteries are fully charged in around 4 hours.

HD COMPACTLINE SERIES

Machine type	Weight class (t)	Basic data			Drums / variants			
		Drum width (mm)	Engine power (kW)	Max. working width (mm)	VV	VO	VT	OT
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard								
HD 10e	2.5	1000	23.4	1050	•	•	•	•
HD 12e	2.5	1200	23.4	1250	•	•	•	•

VV Vibration at front - vibration at rear VT Vibration at front - set of wheels at rear
 VO Vibration at front - oscillation at rear OT Oscillation at front - set of wheels at rear

CO₂ saving
10 kg per operating hour

Li-ion battery
with 23 kW h capacity

Automatic engine stop
fitted as standard

THE ASPHALT PROFESSIONALS

Ruggedly built and robust



Plenty of side clearance

elevated side panels for compaction right to the edges

Good visibility

outstanding overview from any seat position

Easy maintenance

all points easily accessible on one side of the machine

The HD series tandem rollers are highly valued the world over as professional machines for asphalt construction. Their intelligent design has proved its worth for many years all over the world and stands out for its robust execution. From the ergonomically optimised operator's platform or spacious cabin, the driver has everything in view - the drum, the water sprinkling system and the surrounding construction site.

The special kinematics of the 3-point articulation ensure even weight distribution, first-rate directional stability and outstanding driving stability. The turning circle is also very small and the track offset very large.

HD SERIES

Basic data					Drums / variants		
Machine type	Weight class (t)	Drum width (mm)	Engine power (kW)	Max. working width (mm)	VV	VO	VT
Machines in accordance with the EPA Tier 3 exhaust emission standard							
HD 70	7	1500	55.4	1600	•		•
HD 75	8	1680	55.4	1780	•	•	•
HD 90	9	1680	100	1780	•	•	•
HD 110	11	1680	100	1780	•		•

VV Vibration at front - vibration at rear VO Vibration at front - oscillation at rear VT Vibration at front - set of wheels at rear



FIRST-CLASS COMPACTION

Uncompromisingly good



The articulated tandem rollers in the HD+ series cover the range between 7 and 14 t with over 50 models. The XXL cabin or platform is very spacious and comfortable. From this ergonomically optimised workstation, drivers have an excellent overview of the drums, water sprinkling system and surrounding area. The HD+ series offers impressive handling and compaction thanks to the 3-point articulation and homogeneous weight distribution.

Whether for straights, slopes, bends or roundabouts: These rollers quickly produce perfectly smooth surfaces. For simple edge finishing, the track offset is particularly large. The rollers are also equipped with large water and diesel tanks for long working days without the need to stop and refill. The rollers can also be operated with HVO fuels.

HD+ SERIES

Basic data					Drums / variants						
Machine model	Weight class (t)	Drum width (m)	Engine power (kW)	Max. working width (mm)	VV	VV-S	VO	VO-S	VT	VT-S	OT
Machines in accordance with the EPA Tier 3 exhaust emission standard											
HD+ 90	9	1680	100	1850	•		•		•		
HD+ 110	11	1680	100	1850	•		•		•		
HD+ 120	12	1980	100	2150	•		•				
HD+ 140	14	2140	100	2310	•		•				
Machines in accordance with the EPA Tier 4 exhaust emission standard											
HD+ 70i	7	1500	55.4	1635	•		•		•		
HD+ 80i	8	1680	55.4	1815	•	•	•	•	•	•	•
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard											
HD+ 70i	7	1500	55.4	1635	•		•		•		
HD+ 80i	8	1680	55.4	1815	•	•	•	•	•	•	•
HD+ 90i PH	9	1680	55.4	1850	•	•	•	•	•	•	
HD+ 90i	9	1680	85	1850	•	•	•	•	•	•	
HD+ 110i	11	1680	85	1850	•		•		•		
HD+ 120i	12	1980	115	2150	•		•				
HD+ 140i	14	2140	115	2310	•		•				

VV Vibration at front - vibration at rear
 VO Vibration at front - oscillation at rear
 VT Vibration at front - set of wheels at rear

OT Oscillation at front - set of wheels at rear
 VV-S Split vibration at front - split vibration at rear
 VO-S Split vibration at front - oscillation at rear

VT-S Split vibration at front - set of wheels at rear
 PH Power Hybrid

Easy operation

clear, language-neutral operating elements

Large drums

large drum diameters and widths

Two water tanks

large tanks with communicating line for even weight distribution

THE PREMIUM CLASS FOR ASPHALT COMPACTION

Powerful, precise and productive



In the HX series tandem rollers, the Easy Drive operating concept provides top-class ergonomics and comfort. The fully glazed panoramic cabin or platform offers optimal visibility. Drivers have a good overview of the drum edges, the edge pressing and cutting device and the construction site at all times. Viewing panes in the cabin floor also allow an uninterrupted view of the drums or wheels. The HX series has pivot steering with very large track offset and large turning angles. This means it can be steered sensitively in four differ-

ent steering modes. In combination with the uniform weight distribution and the automatic mechanism for gentle acceleration and braking, they produce asphalt surfaces of impeccable evenness - even in tight curves. For all weight classes, there are split vibrations and oscillation drums. The Smart Compact digital compaction assistant actively supports the choice of compaction parameters. The rollers can also be operated with HVO fuels.

HX SERIES

Basic data					Drums / variants				
Machine model	Weight class (t)	Drum width (m)	Engine power (kW)	Max. working width (mm)	VV	VV-S	VO-S	VS-OS	VT-S
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard									
HX 70i	7	1500	55.4	2770		•	•	•	•
HX 90i	9	1680	74.4	3050	•	•	•	•	•

VV Non-split vibration at front - non-split vibration at rear
VV-S Split vibration at front - split vibration at rear
VO-S Split vibration at front - non-split oscillation at rear

VS-OS Split vibration at front - split oscillation at rear
VT-S Split vibration at front - set of wheels at rear



Easy Drive
enables safe, intuitive operation

High productivity
thanks to large tanks

Convenient water system
central pressure refuelling, quick to fill

COMPACT CLIMBERS

Great compaction force - even for small construction sites



The extremely compact, very short compactors of the HC CompactLine series offer a huge gradeability of up to 60% and maximum ground clearance. They are driven by modern wheel motors. The very short wheelbase and 3-point articulation ensure optimal driving and handling characteristics - ideal for cramped construction sites and for compaction on rough terrain.

The operator's platform or cabins of the HC CompactLine impress with their exceptional visibility and ease of operation. Drivers can very quickly adjust the very spacious, ergonomically optimised workstation to their individual height and weight. This makes the HC CompactLine compactor models perfect for machine rental.

HC CL SERIES

Basic data				Drums/variants		
Machine model	Weight class (t)	Drum width (m)	Engine power (kW)	V	VIO	P
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard						
HC 50i	5	1370	55.4	•		•
HC 70i	7	1680	55.4	•	•	•

V Smooth drum with vibration VIO Smooth drum, can switch between vibration and oscillation P Padfoot drum



High gradeability

large slope angle and powerful travel drive

Compact shape

ideal for cramped construction sites

3-point articulation

driving comfort, outstanding off-road mobility, safe manoeuvring

POWERFUL HEAVYWEIGHTS FOR EARTHWORKS

Powerful and comfortable



The HC series compactors are powerful professionals with a big compaction force. The 3-point articulation and large slope angle front and back make them extremely manoeuvrable whilst ensuring optimum driving stability. The HC series is well prepared for the quality and communication requirements of the future with interfaces and hardware.

The cabin or operator's platform is ergonomically optimised and the compactors are especially convenient and simple to operate thanks to Easy Drive. They also feature an outstanding view of the drum and the working field. Modern engines ensure low emissions. They can also be operated with HVO fuels. The engine hood can be opened wide. This makes it easier to access the points requiring daily maintenance.

HC SERIES

Basisdaten				Drums / variants			
Machine model	Weight class (t)	Drum width (mm)	Engine power (kW)	V	VIO	P	R
Machines in accordance with the EPA Tier 3 exhaust emission standard							
HC 110	11	2140	101	•		•	
HC 110 C	11	2140	101	•		•	
HC 130	13	2140	101	•	•	•	
HC 130 C	13	2140	101	•		•	
HC 160	16	2140	101	•		•	
HC 180	18	2140	155	•		•	
HC 200	20	2140	155	•		•	
HC 200 C	20	2140	155	•		•	
HC 250 C	25	2140	155	•		•	•
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard							
HC 110i	11	2140	85	•		•	
HC 110i C	11	2140	85	•		•	
HC 120i	12	2140	85	•		•	
HC 120i C	12	2140	85	•		•	
HC 130i	13	2140	119.6	•	•	•	
HC 130i C	13	2140	119.6	•		•	
HC 140i	14	2140	119.6	•		•	
HC 160i	16	2140	119.6	•		•	
HC 160i C	16	2140	119.6	•		•	
HC 180i	17	2140	160	•		•	
HC 200i	20	2140	160	•		•	
HC 200i C	20	2140	160	•		•	
HC 250i C	25	2140	160	•		•	•

V Smooth drum with vibration

VIO Smooth drum, can switch between vibration and oscillation

P Padfoot drum

C "Climbing" equipment for increased gradeability

R Extended "climbing" equipment for heavy-duty use

Easy Drive

safe, intuitive operation, lots of comfort options

Excellent gradeability

large slope angle, powerful travel drive

Large linear load

up to 78 kg/cm, depending on the model



ROBUST ENGINEERING FOR ALL MARKETS

Flexible use in earthworks



3-point articulation

optimal driving comfort, outstanding off-road mobility, safe manoeuvring

Excellent gradeability

large slope angle, powerful travel drive

Easy maintenance

all points easily accessible on one side of the machine

The HC 119 and HC 129 models offer drivers a spacious operator's platform and pleasant workstation. The compactors are very easy to operate. Thanks to the intelligent design, the visibility is outstanding, yet the compactors are also built to be robust.

All HC 119 and HC 129 compactors have a drum drive. In action on the construction site, they stand out for their high compaction power, small turning circle and low noise emissions. A modern power train enables a gradeability of up to 58%. Fuel consumption remains low thanks to the ECO mode integrated as standard. The compactors can also be operated with B20 fuels.

HC SERIES

Machine model	Basic data			Drums
	Weight class (t)	Drum width (mm)	Engine power (kW)	V
HC 119	11	2140	82	•
HC 129	12	2140	82	•

V Smooth drum with vibration



INNOVATION ON EIGHT WHEELS

The flexible powerhouses




The HP series of pneumatic-tyre rollers offer impressive performance in earthworks and asphalt construction. All models offer a spacious and comfortable operator's platform. An asymmetric frame and the intelligent machine design provide for excellent visibility. Another feature is the language-neutral operation. This makes the drivers' work easier and contributes towards safety.

The intelligent ballasting concept means the machine weight can also be changed on the construction site. The exceptionally versatile water-sprinkling system with its innovative additive supply and the modern travel drive offer excellent quality and productivity. With a wide range of options available, the HP series rollers can also be adapted to regional requirements anywhere. The rollers can also be operated with HVO fuels.

HP SERIES

Basic data						
Machine model	Weight class (t)	Max. working width (mm)	Engine power (kW)	Wheel load (t)	Min. operating weight (kg)	Max. operating weight (kg)
Machines in accordance with the EPA Tier 3 exhaust emission standard						
HP 180	8 - 18	2084	89	1.0 - 2.2	8,505	17,170
HP 240	8 - 18	2084	89	1.0 - 2.2	8,505	24,000
HP 280	10 - 28	2084	89	1.3 - 3.5	9,480	26,950
Machines in accordance with the EPA Tier 4 / EU Stage V exhaust emission standard						
HP 180i	8 - 18	2084	55.4	1.0 - 2.2	8,515	17,180
HP 280i	10 - 28	2084	85	1.3 - 3.5	9,505	26,970

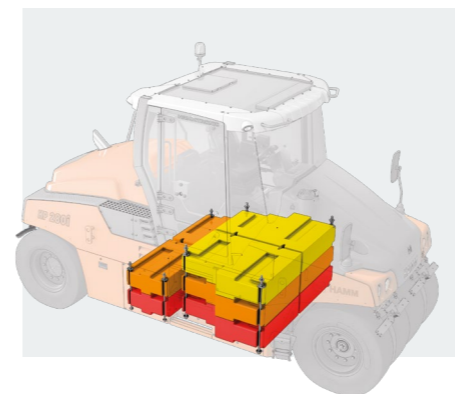

Ballasting concept

quick and accurate equipment of the machine

Large-sized operator's platform

with outstanding all-round visibility

Safety

thanks to extremely powerful brake system

YOUR WIRTGEN GROUP CUSTOMER SUPPORT

Service you can always rely on.

Place your trust in our reliable and fast support during the complete life cycle of your machine. Our wide service offer includes suitable solutions to meet all of your challenges.



Service

We keep our service promises – with fast and uncomplicated assistance both on the building site and in our professional workshops. Our Service team has received expert training. Thanks to special tools, repair, care and maintenance work is completed quickly. Upon request, we can support you with tailored service agreements.

> www.wirtgen-group.com/service



Spare parts

Original parts and accessories from WIRTGEN GROUP can ensure the high reliability and availability of your machines in the long term. Our experts will be glad to advise you on application-optimised wear part solutions. Our parts are available worldwide, at any time and are easy to order.

> parts.wirtgen-group.com



Training

Staff responsible for the WIRTGEN GROUP's product brands are specialists in their areas and have decades of application experience. Our customers also greatly benefit from these experts. In our WIRTGEN GROUP training courses, we gladly pass on our knowledge to operators and service personnel.

> www.wirtgen-group.com/training



Telematics solutions

Construction machines with leading technology and perfected telematics solutions work hand-in-hand in the WIRTGEN GROUP. Intelligent monitoring systems such as WITOS or JD Link* not only facilitate the maintenance planning of your machines but also increase productivity and economy.

> www.wirtgen-group.com/telematics

* WITOS and JD Link are not currently available in all countries. Please consult your responsible branch or dealer if you have any questions in this area.



HAMM



HAMM AG

Hammstraße 1
95643 Tirschenreuth
Germany

T: +49 9631 80-0
F: +49 9631 80-111
M: info@hamm.eu

 www.hamm.eu